




Vibration Isolators & Inertia Base



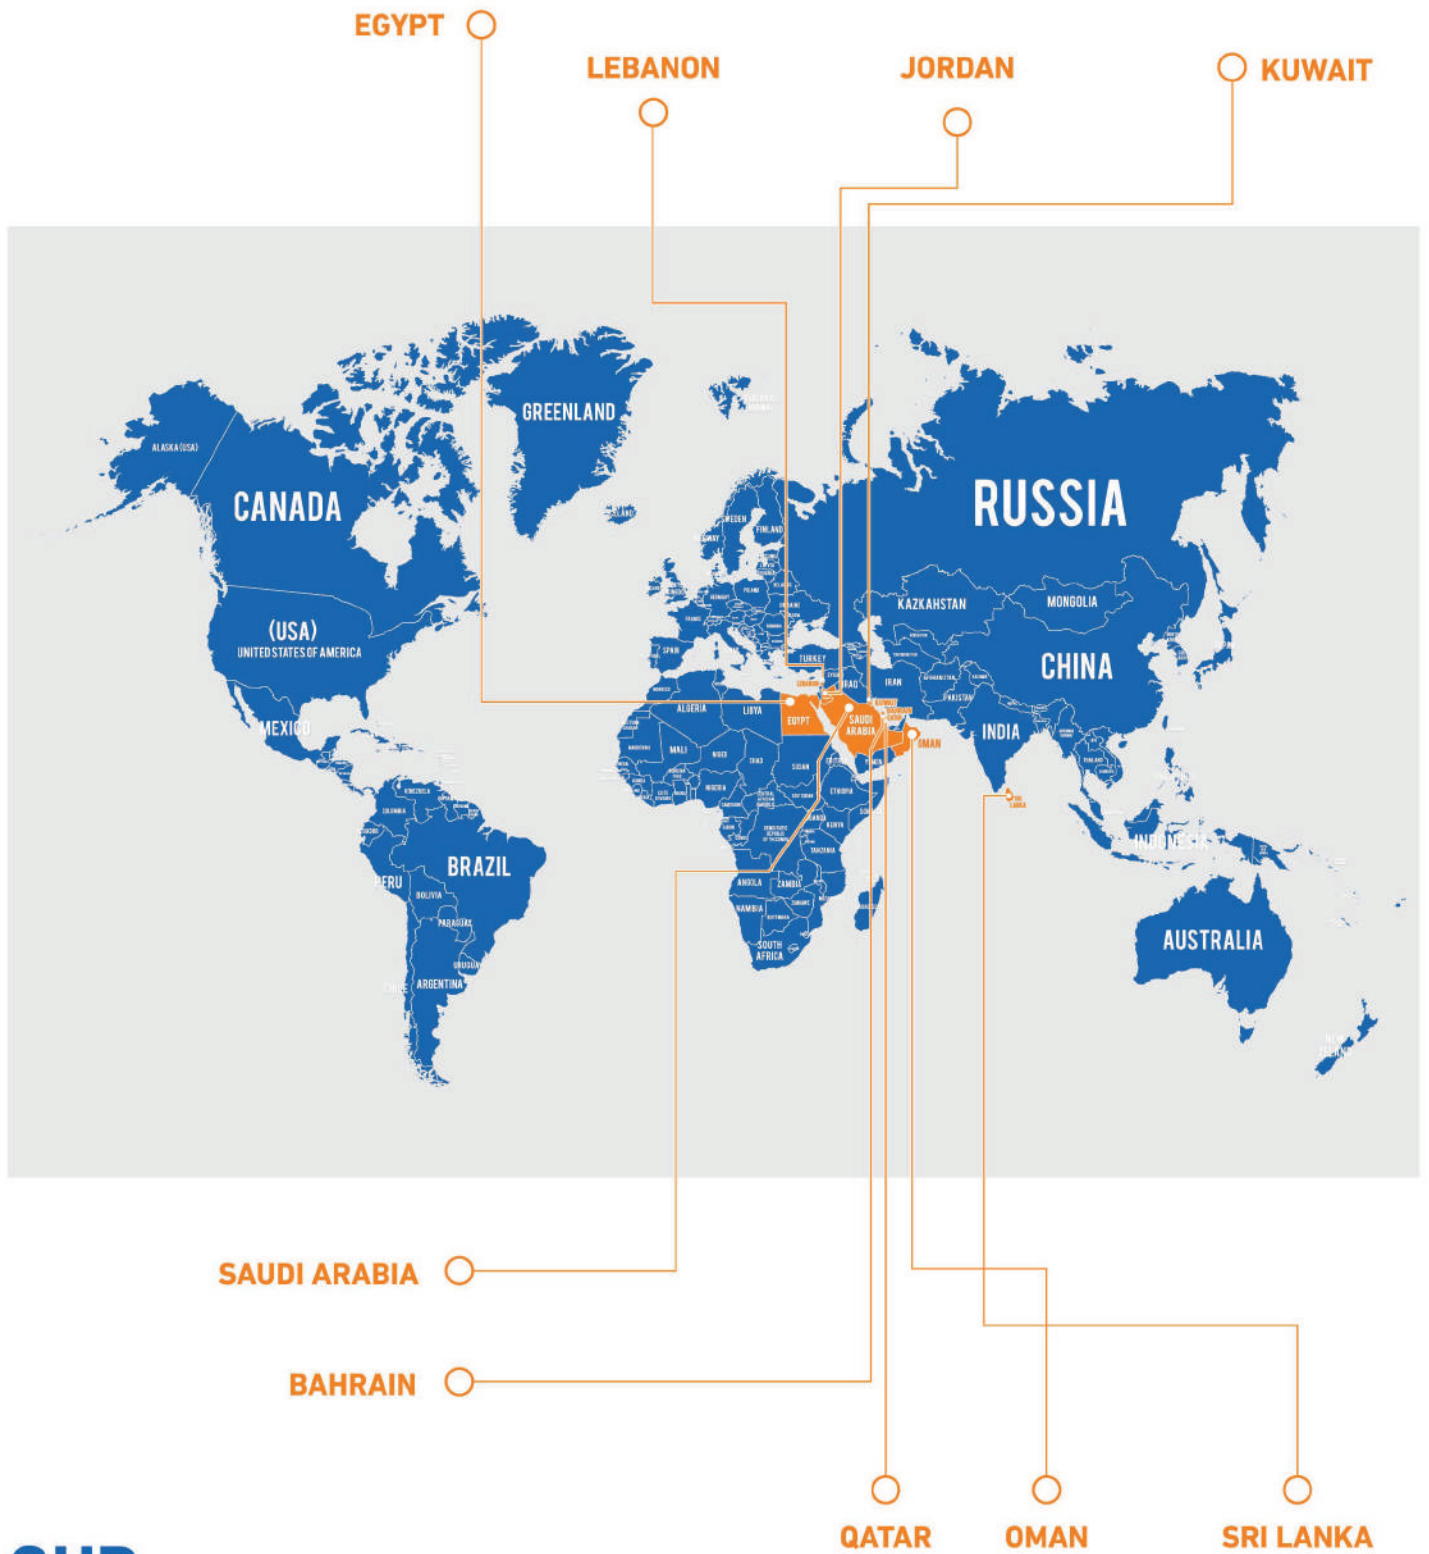

OUR INTERNATIONAL DISTRIBUTION NETWORK ACROSS THE WORLD

Mounting PADS

A) Ribbed Mounting Pad

Features and Benefits:

- Alternative high low ribbed construction
- Pads can be cut to be slightly larger than the size of the leg or machine, using shear or knife.
- Easy Field Installation
- Multiple layers of ribbed mounting pad can be used to increase deflection
- All Size Available



Sr. No.	Model	Sizes (Inches)	Load (Lbs.)	Load (Kg)
1	VRP 18.	18"x 18" x $\frac{3}{8}$ "	12960	5878
2	VRP 66	6"x 6" x $\frac{3}{8}$ "	1440	653
3	VRP 44	4" x 4" x $\frac{3}{8}$ "	640	290
4	VRP 33	3" x 3" x $\frac{3}{8}$ "	360	163

B) Cork Sandwich Pad:

Features and Benefits

- Cork Sandwich Pad are laminated pads having thick close grained cork securely bonded Between two layers of low-high ribbed neoprene rubber pads
- Easy field installation
- Offers highest level of sound attenuation and vibration insulation



Sr. No.	Model	Sizes (Inches)	Load (Lbs.)	Load (Kg)
1	VCP 18	18"x 18" x $\frac{7}{8}$ "	16200	7348
2	VCP 66	6"x 6" x $\frac{7}{8}$ "	1000	454
3	VCP 44	4" x 4" x $\frac{7}{8}$ "	860	390
4	VCP 33	3" x 3" x $\frac{7}{8}$ "	450	204

Specifications are subjected to change without prior notice due to continuous product development
Dimensions are subjected to 5% tolerance

Website: www.verdantuae.com

C) Metal Sandwich Pad

Features and Benefits:

- Made of high quality and galvanized steel sheet also available in multiple layers of one steel plate bonded in between two rubber sheets
- Size available 100 x 100 mm and 150 x 150 mm, thickness of 19.5 to 35 mm.
- Any other sizes and thickness can be made




Sr. No.	Model	Sizes (Inches)	Load (Lbs.)	Load (Kg)
1	VMP1 - 18	18"x 18" x ¾"	32400	14916
2	VMP1 - 66	6"x 6" x ¾"	3600	1632
3	VMP1 - 44	4" x 4" x ¾"	1600	725
4	VMP1 - 33	3" x 3" x ¾"	900	408

Sr. No.	Model	Sizes (Inches)	Load (Lbs.)	Load (Kg)
1	VMP2 - 18	6"x 6" x 1 ¼"	10360	4700
2	VMP2 - 66	4"x 4" x 1 ¼"	5000	2265

D) Waffle Pad

Features and Benefits:

- Made of high quality rubber, available in different desing.
- Variable sizes available with ¾" thick
- Compounded for excellent resistance to again, compressor set & oil
- Load capacity from 10(0.7kg/sq.cm) to 60(4.2kg/sq.cm) psi.

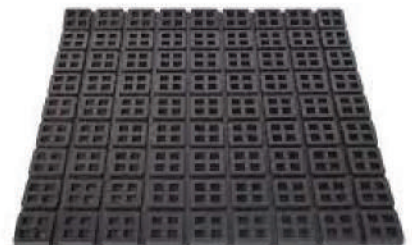

Specifications are subjected to change without prior notice due to continuous product development
Dimensions are subjected to 5% tolerance

Website: www.verdantuae.com

NOTE

This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



Warehouse No. 44 , Block A
UAQ free Trade Zone
Umm Al Quwain UAE



+971 6 539 1555

sales@verdanttrading.com



www.verdantuae.com