




Vibration Isolators & Inertia Base



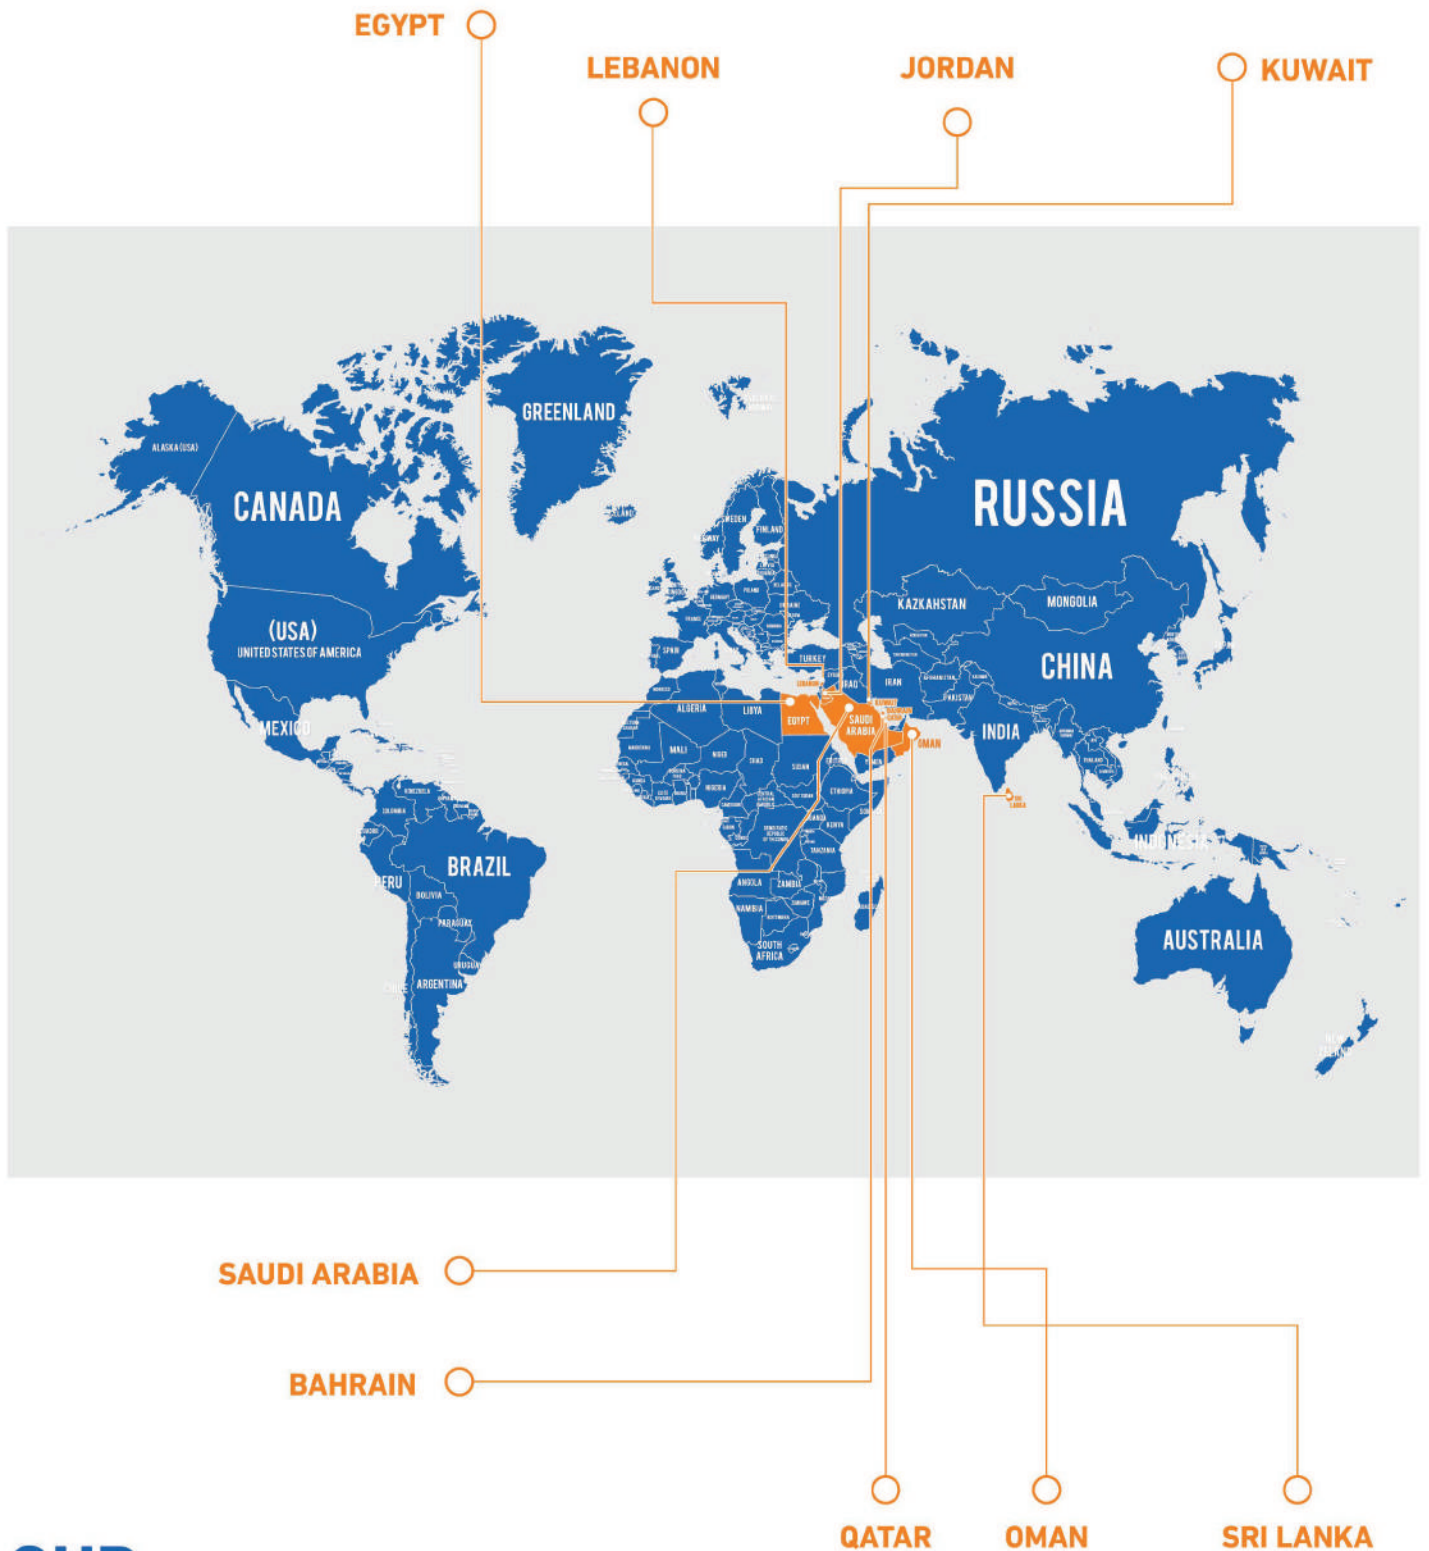

OUR INTERNATIONAL DISTRIBUTION NETWORK ACROSS THE WORLD

HOUSE SPRING MOUNT



Features and Benefits

- Spring Mounts are used to isolate noise and vibration from floor mounting equipment
- Pumps, packaged air handling units, air condition units, centrifugal and axial fans, inertia base etc.
- **Verdant** spring Mount are fabricated using high quality natural Neoprene and heavy steel spring.
- Powder coated spring.
- Color coded spring as per load ratings

Selection Table For 25 mm Deflection Casing Spring Mounts										
Isolator Model	Rated Load(Kg)	Spring Color (s)	Demansion (mm)							
			L	W	H*	HIR	A	BC	D	d
VIHSM 1-15	15	PINK	160	60	98	68	103	145	M 10	12
VIHSM 1-30	30	RED								
VIHSM 1-50	50	BLUE								
VIHSM 1-80	80	MAROON								
VIHSM 1-100	100	WHITE								
VIHSM 1-150	150	YELLOW								
VIHSM 1-200	200	BLACK								
VIHSM 1-300	300	GREEN								
VIHSM 1-400	400	BROWN	190	76	150	95	120	170	M 12	14
VIHSM 1-500	500	BLUE								
VIHSM 1-600	600	D.PURPLE								
VIHSM 1-800	800	L.PURPLE								
VIHSM 1-900	900	RED								
VIHSM 1-1000	1000	GREY								
VIHSM 1-1200	1200	L.GREEN								
VIHSM 1-1400	1400	ORANGE	262	76	150	95	183	162	M 16	14
VIHSM 1-1600	1600	L.BROWN								
VIHSM 1-1800	1800	L.GREEN								
VIHSM 1-2000	2000	L.BLUE								
VIHSM 1-2500	2500	L.PURPLE								
VIHSM 1-3000	3000	WHITE								

NOTE

This image shows a single sheet of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page. There are approximately 20 lines visible. The paper has a slightly textured appearance and is set against a dark background.



Warehouse No. 44 , Block A
UAQ free Trade Zone
Umm Al Quwain UAE



+971 6 539 1555

sales@verdanttrading.com



www.verdantuae.com